





TSI MEDIA 230 VAC



MODULAR INVERTER MODULE

POWER 1.5 kVA
INPUT 48 Vdc
OUTPUT 230 Vac



DESCRIPTION

MEDIA is a compact and scalable modular inverter providing a pure sine wave AC supply. In conjunction with a DC Power system, it provides an excellent AC backup solution. It uses the latest inverter technology, providing superior energy efficiency in a compact size.

The "Twin Sine Innovation" (TSI) technology eliminates all single points of failure with full scalability; up to 32 modules in parallel and high efficiency of up to 95% reducing operating costs.

APPLICATIONS

All business critical applications and all types of AC loads. The design is modular and scalable with hot-swappable inverter modules which ensures low Mean Time to Repair (MTTR), reduction in service costs and meets the changing needs for future expansion.


MAIN FEATURES

- » Dual input sources (AC & DC) with wide AC input range 150 Vac to 265 Vac
- » Compact design
- » High efficiency
- » Transfer time reduced to 0


GENERAL	
EMC (immunity)	EN 61000-4-2 / EN 61000-4-3 / EN 61000-4-4 / EN 61000-4-5 / EN 61000-4-6 / EN 61000-4-8
EMC (emission) (class)	EN 55022 (B)
Safety	EN 62040-1
Cooling / Isolation	Forced / Doubled
MTBF	> 200 000 hrs (MIL-217-F)
Efficiency (Typical): Enhanced power conversion / on line	95% / 91%
Dielectric strength DC/AC	4 300 Vdc
True Redundant Systems – compliant	3 disconnection levels on AC out and DC in power ports 4 disconnection levels on AC in port
RoHS	Compliant
Vibration	GR63 office vibration 0 to 100 hz-0.1 g / transport vibration 5-100 Hz 0.5 g 100 to 500 hz-1.5 g / Drop test Designed for installation in an IP20 or IP21 environment.
Operating conditions	When installed in a dusty or humid environment, appropriate measures (air filtering, ...) must be taken.
Altitude above sea without de-rating	< 1500 m / derating > 1500 m – 0.8 % per 100 m
Ambient / storage temperature / relative humidity	-20 to 50 ° C / -40 to 70 ° C / 95 %, non-condensing
Material (casing)	Coated steel-ALU ZINC
AC OUTPUT POWER	
Nominal Output power (VA) / (W)	1500 VA / 1200 W
Short time overload capacity	150 % (15 seconds) 110 % permanent within T° range
Admissible load power factor	Full power rating from 0 inductive to 0 capacitive
Internal temperature management and switch off	Yes
DC INPUT SPECIFICATIONS	
Nominal voltage (DC)	48 V
Voltage range (DC)	40 - 60 V
Nominal current (at 48 Vdc and 1200 W output)	28 A
Maximum input current (for 15 second) / Voltage ripple (resistive load 54 Vdc)	48 A / < 2 mV
Input voltage boundaries	User selectable
AC INPUT SPECIFICATIONS	
Nominal voltage (AC)	220/230/240 V 1P or 3P (min 3 shelves for 3P)
Voltage range (AC)	150 - 256 V
Brownout	150 to 185 V 1056 W @ 150 V
Conformity range before transfer to DC	Adjustable
Power factor	> 99%
Frequency range (selectable) / synchronization range	50 – 60 Hz / range 47 – 53 Hz / 57 – 63 Hz
AC OUTPUT SPECIFICATIONS	
Nominal voltage (AC*)	220/230/240 V
Frequency / frequency accuracy	50 - 60 Hz / 0.03 %
Total harmonic distortion (resistive load)	< 3 %
Load impact recovery time	0.4 ms
Turn on delay	40 s
Nominal current. Protected against reverse current	6.6 A
Crest factor at nominal power	2.8 : 1
With short circuit management and protection	
Short circuit clear up capacity	10 x I _n for 20 msec - Available when AC input connected and present
Short circuit current after clear up capacity	2.1 I _n
IN TRANSFER PERFORMANCE	
Max. voltage interruption / total transient voltage duration (max)	0 s / 0 s
SIGNALING & SUPERVISION	
Display	Synoptic LED
Alarms output / supervision	Dry contacts on shelf / Standard USB port and MODBUS on T2S, optional : Candis Display / Candis TCP-IP
Remote on / off	on rear terminal of the shelf via T2S

TSI MEDIA 230 – Datasheet v1.2 Specifications can change without notice. New data will be updated on our Web site: www.cet-power.com. The present equipment is protected by several international patents, trademarks and copyrights.

331 mm / 13"

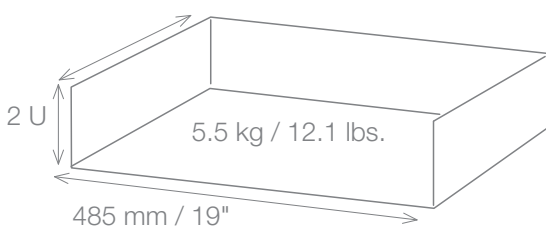

267 mm / 10.5"

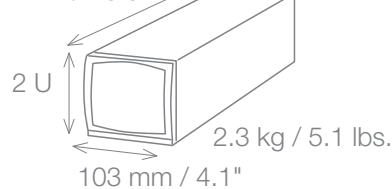

*Operation within lower voltage networks leads to de-rating of power performances.

Illustrations are non-binding and may include customized fittings.

Leading AC Backup Technology

